

## INLINE CENTRIFUGAL DUCT FANS

### ILG Model SQDA - Direct Drive

ILG Centrifugal Inline Standard Duct Fan. Performance ratings are AMCA Certified for Air and Sound and are U.L. Listed. All Motors are 115V, Single Phase.

#### Construction


- Housing of durable mill galvanized steel.
- Three sides are removable providing access internally
- Factory mounted motor and drive with pre-set fan RPM.
- Backplate Fins draw cool air through motor.
- Low noise levels.

#### Motors and Electrical

- U.L. 705 Listing, Stock fans only.
- Integral Motor Thermal Overload Protection on all standard single phase motors.
- Safety disconnect.

#### Impeller

- Backward inclined aluminum blades.

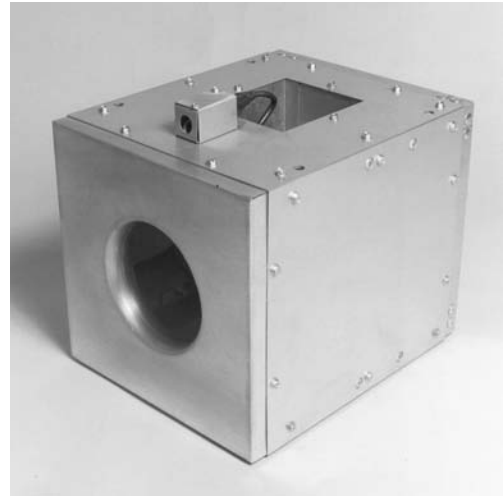


Model	Power HP	RPM	CFM @ Listed Static Pressure					Sones	Price Each	Hanging Isolator+ Bracket	Gravity Damper BDDV
			0"	.125"	.25"	.50"	.75"				
SQDA 10	1/10	1550	704	663	612	536	-	9.0	\$263	\$48	\$36
SQDA 12	1/8	1050	1047	955	856	618	-	6.6	408	48	53
SQDA 13	1/5	1140	1615	1525	1431	1218	936	9.0	554	48	64
SQDA 16	1/2	825	2226	2042	1919	1568	-	6.5	633	48	90

#### Notes:

- 1) Model SC72W speed control may be used for up to 50% speed reduction. Price each is \$25.

Model	Dimensions Listed in Inches			Approx. Weight
	A	B	C	
SQDA 10	17	14	-	50
SQDA 12	25 3/4	18	1 3/8	120
SQDA 13	26 3/8	20	1 3/8	125
SQDA 16	27 3/8	25 1/2	1 3/8	200

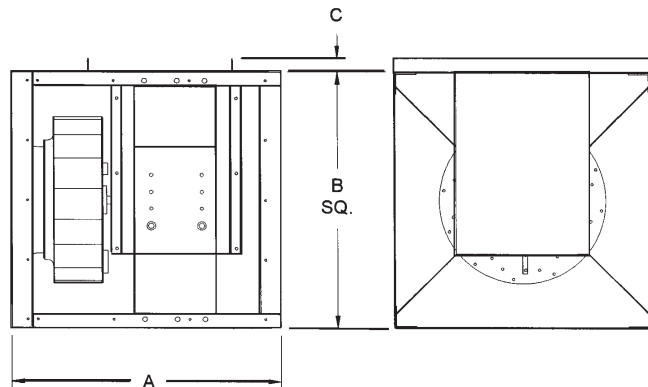

L. R. GORRELL COMPANY

PRICES SUBJECT TO CHANGE WITHOUT NOTICE! Minimum Order is \$25.00